



## Lifting module Shop-Floor Telescope

### Manual-hydraulic and electro-mechanical version

#### Table of contents

1	Manual-hydraulic version	1
2	Electro-mechanical version	9

#### 1 Manual-hydraulic version



#### Table of contents

1.1	Description of the product	1
1.2	Validity of the documentation	1
1.3	Target group of this document	1
1.4	Symbols and signal words	1
1.5	For your safety	2
1.6	Personal protective equipment	2
1.7	Application	3
1.8	Installation	3
1.9	Start up	4
1.10	Operation	5
1.11	Maintenance	5
1.12	Trouble shooting	6
1.13	Technical characteristics	6
1.14	Accessory	7
1.15	Disposal	7
1.16	Declaration of conformity	7
1.17	Declaration of conformity	8

#### 1.1 Description of the product

The lifting module Shop-Floor Teleskop is particularly suitable for lifting and lowering assembly fixtures, working tables and demonstration objects in industrial applications as well as for medical treatment equipments in medical applications. In general, lifting modules are used as base unit of devices for controlled lifting and lowering of loads or for height adjustment only. This version excels particularly by the low base height and the very high strokes.

#### 1.2 Validity of the documentation

This document applies to the following products:

Manual-hydraulic lifting modules of the data sheet M 4.202.

The following types or part numbers are concerned:

- 8918-01-30-H, -40-H, -60-H, -80-H, -100-H
- 8918-02-30-H, -40-H, -60-H, -80-H, -100-H

#### 1.3 Target group of this document

- Specialists, fitters and set-up men of machines and installations with hydraulic expert knowledge.

#### Qualification of the personnel

**Expert knowledge** means that the personnel must

- be in the position to read and completely understand technical specifications such as circuit diagrams and product-specific drawing documents,
- have expert knowledge (electric, hydraulic, pneumatic knowledge, etc.) of function and design of the corresponding components.

An **expert** is somebody who has due to its professional education and experiences sufficient knowledge and is familiar with the relevant regulations so that he

- can judge the entrusted works,
- can recognize the possible dangers,
- can take the required measures to eliminate dangers,
- knows the acknowledged standards, rules and guidelines of the technology.
- has the required knowledge for repair and mounting.

## 1.4 Symbols and signal words

### **DANGER**

#### **Danger of life / heavy health damages**

Stands for an imminent danger.

If it is not avoided, death or very severe injuries will result.

### **WARNING**

#### **Person damage**

Stands for a possibly dangerous situation.

If it is not avoided, death or very severe injuries will result.

### **CAUTION**

#### **Easy injuries / property damage**

Stands for a possibly dangerous situation.

If it is not avoided, minor injuries or material damages will result.



#### **Hazardous to the environment**

The symbol stands for important information for the proper handling with materials that are hazardous to the environment.

Ignoring these notes can lead to heavy damages to the environment.



#### **Mandatory sign!**

The symbol stands for important information, necessary protection equipment, etc.

### **NOTE**

This symbol stands for tips for users or especially useful information. This is no signal word for a dangerous or harmful situation.

## 1.5 For your safety

### 1.5.1 Basic information

The operating instructions serve for information and avoidance of dangers when installing the products into the machine as well as information and references for transport, storage and maintenance.

Only in strict compliance with these operating instructions, accidents and property damages can be avoided as well as trouble-free operation of the products can be guaranteed.

Furthermore, the consideration of the operating instructions will:

- avoid injuries
- reduce down times and repair costs,
- increase the service life of the products.

### 1.5.2 Safety instructions

The product was manufactured in accordance with the generally accepted rules of the technology.

Observe the safety instructions and the operating instructions given in this manual, in order to avoid personal damage or material damage.

- Read these operating instructions thoroughly and completely, before you work with the product.
- Keep these operating instructions so that they are accessible to all users at any time.
- Pay attention to the current safety regulations, regulations for accident prevention and environmental protection of the country in which the product will be used.
- Use the ROEMHELD product only in perfect technical condition.

- Observe all notes on the product.
- Use only accessories and spare parts approved by the manufacturer in order to exclude danger to persons because of not suited spare parts.
- Respect the intended use.
- You only may start up the product, when it has been found that the incomplete machine or machine, in which the product shall be mounted, corresponds to the country-specific provisions, safety regulations and standards.
- Perform a risk analysis for the incomplete machine, or the machine.

Due to the interactions between the product and the machine/fixture or the environment, risks may arise that only can be determined and minimized by the user, e.g. :

- generated forces,
- generated movements,
- Influence of hydraulic and electrical control,
- etc.

### 1.5.3 Warning

#### **WARNING**

#### **Injuries due to misuse, incorrect operation or abuse!**

Injuries can occur if the product is not used within the intended use and the technical performance data.

- Before start up, read the operating instructions!

## 1.6 Personal protective equipment



**For works at and with the product, wear safety goggles!**



**For works at and with the product, wear protective gloves!**



**For works at and with the product, wear safety shoes!**

### 1.6.1 Safety devices

The below safety devices are for the safety of the operators. As a matter of principle no safety devices may be detached, put out of action or modified.

**Used safety devices**



Figure 1: Positions of the safety devices

l Name plate with details of max. load, etc. (position can vary)	o Mandatory sign "Read and follow the operating instructions"
p Protective frame	

**1.6.2 Check the safety devices**

**NOTE**

**Use the regulations**

- To check the safety device use the check lists "General examination" and / or "Functional testing". Eliminate immediately recognised defects at the safety devices.

**Testing intervals**

- at the beginning of every shift
- once a week in case of continuous shift
- after each maintenance or repair

**Testing content**

- Function
- State and position
- Safe fixing

**General examination**

Covers	Number, available and undamaged
Screw plugs	Number, available and undamaged
Name plates with specifications	Number, available, readable and undamaged
Danger signs	Number, available and undamaged
Mandatory signs	Number, available and undamaged
Further safety devices available	available, undamaged and ready for operation
Testing date:	Tester (signature):

(Number see "Position of safety devices")

**1.7 Application**

**1.7.1 Intended use**

The products are used in industrial / commercial applications to transform hydraulic pressure into movement and /or force. They must only be operated with hydraulic oil.

Furthermore the following belongs to possible uses:

- Use within the capacity indicated in the technical characteristics.
- Use as per operating instructions.
- Compliance with service intervals.
- Qualified and trained personnel for the corresponding activities.
- Mounting of spare parts only with the same specifications as the original part.

**1.7.2 Misapplication**

**WARNING**

**Injuries, material damages or malfunctions!**

Modifications can lead to weakening of the components, reduction in strength or malfunctions.

- Do not modify the product!

The use of these products is not admitted:

- For domestic use.
- On pallets or machine tool tables in primary shaping and metal forming machine tools.
- In areas for which special guidelines apply, especially installations and machines:
  - For the use on fun fairs and in amusement parks.
  - In food processing or in areas with special hygiene regulations.
  - In mines.
  - In explosive and aggressive environments (e.g. ATEX).
- For other operating and environmental conditions.
- For applications other than vertical lifting of loads. Hanging operation (e. g. from the ceiling) is inadmissible.

**Special solutions are available on request!**

**1.8 Installation**

**1.8.1 Design**

**WARNING**

**Injury by dropping parts!**

Some products have a heavy weight and can cause injury when dropping.

- Transport products professionally.
- Wear personal protection equipment!

Weight specifications see chapter "Technical characteristics".

**CAUTION**

**Heavy weight may drop**

- Some product types have a considerable weight. These have to be secured against dropping during transport.
- Weight specifications see chapter "Technical characteristics".

**Transverse forces and forced conditions!**

Side loads and forced conditions on the product lead to the premature failure.

- Avoid forced conditions (overdetermination) of the product.
- Max. forces and torques see technical characteristics.

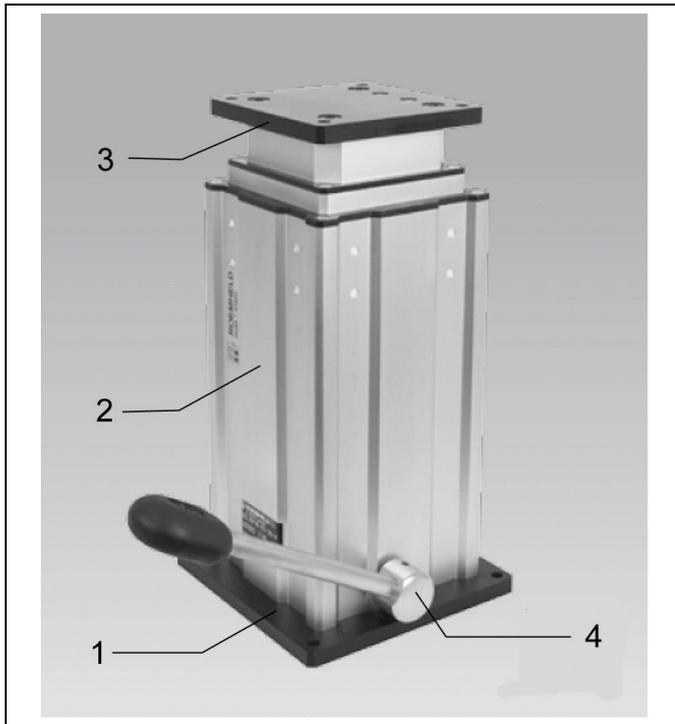


Figure 2: Components

1 Base plate	3 Top plate
2 Guide unit	4 Lifting jack with foot pedal

### 1.8.2 Fixing of the product

#### **⚠ WARNING**

##### **Injury due to overturning product!**

- Overturning product due to missing or incorrect fixing!
- Fasten bottom plate on the floor.
- When introducing torques within the load limit (see technical characteristics) we recommend to use an additional base plate (accessory) and to secure this plate correctly.

#### **⚠ CAUTION**

##### **Stroke module, pump lever not operate on bottom base plate**

Foot pedal is pressed down below the lower edge of the base plate.

- The customer has to make sure that this will be prevented by the concrete floor or a corresponding base plate connecting construction.

1. Install the product so that for the required cleaning and maintenance works there is all around a clearance zone of at least 700 mm.
2. The product has to be mounted horizontally on a plane and solid concrete floor (concrete strength grade B 25) or a rigid connecting construction of the customer (flatness 0.20 mm).
3. Fasten the bottom plate of the product with hexagon socket head cap screws ISO 4762 - M10 onto the concrete floor or the connecting construction of the customer.
4. For this purpose professionally insert into the concrete floor heavy-duty dowels (e.g. Fischer part-no.: SL M-10 N).

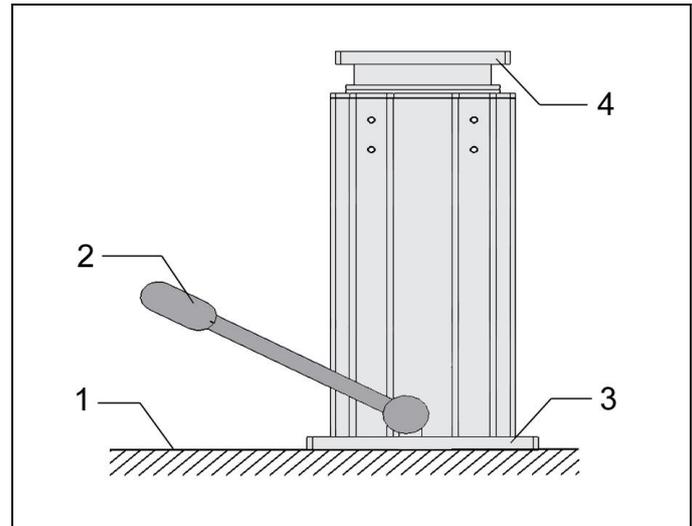


Figure 3: Principle of fixing

1 Concrete floor or connecting construction	3 Base plate
2 Foot pedal	4 Top plate

### 1.8.3 Mounting of the customer's connecting construction

#### **⚠ WARNING**

##### **Injury due to overturning product!**

- Overturning product due to eccentric load provided by the user!
- The centre of gravity of the user's load must be within the 4 fixing screws of the bottom plate.
- When introducing torques within the load limit (see technical characteristics) we recommend to use an additional base plate (accessory) and to secure this plate correctly.

1. For fixing of the customer's connecting construction there are 4 bore holes (for M10 -  $\varnothing$  10.5 mm ) at the top plate. All provided bore holes have to be used!
2. Fasten the connecting construction at the top plate.

#### **ℹ NOTE**

##### **Dangers due to the connecting construction of the customer**

Dangers due to the connecting construction of the customer, as e.g. squeezing points have to be excluded by the customer's design.

### 1.9 Start up

#### **⚠ WARNING**

##### **Poisoning due to contact with hydraulic oil.**

Wear, damage of the seals, aging and incorrect mounting of the seal kit by the operator can lead to escapes of oil.

Incorrect connection can lead to escapes of oil at the ports.

- For handling with hydraulic oil consider the material safety data sheet.
- Wear protection equipment.

1. Check seating of all screw connections (check tightening torques).

**NOTE**

**Admissible load**

The product may only be used with push loads. The centre of gravity should be within the traverse of the fixing screws.  
If this is not observed, there may be a malfunction.

**1.10 Operation**

**WARNING**

**Injuries due to non-compliance of the operating instructions!**

- The product may only be operated, if the operating instructions - especially the chapter "Safety instructions" have been read and understood.

**Injury by crushing!**

Components of the product make a movement while they are in operation, this can cause injuries.

- Keep parts of the body and items out of the working area!

**Injuries due to misuse, incorrect operation or abuse!**

Injuries can occur if the product is not used within the intended use and the technical performance data.

- Before start up, read the operating instructions!

The operator is obliged to report immediately any changes at the product that may affect the safety to the safety expert or to the person who is responsible for safety and to stop operating the product.

**1.10.1 Working place**

The working place is designed in front of the lifting module.

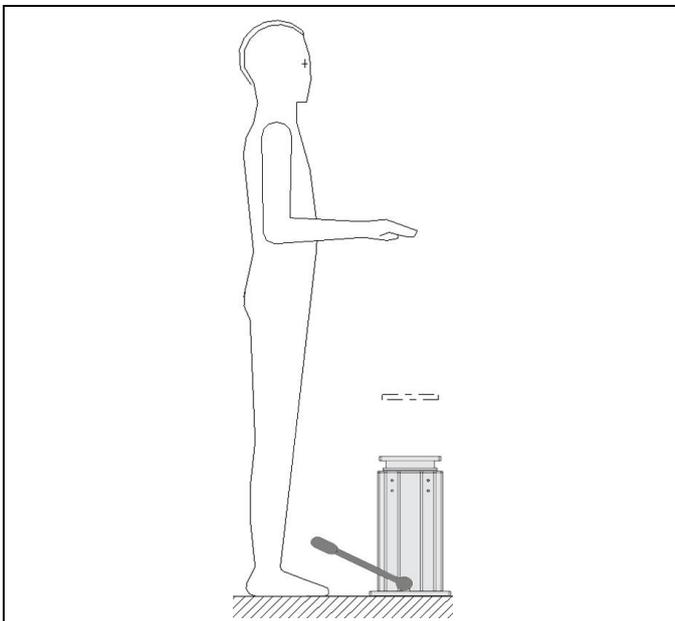


Figure 4: Working place

**1.10.2 Behaviour in an emergency**

In emergencies the product may not be operated.

**1.10.3 Lifting**

The stroke movement is produced by the internal, hermetically-sealed, hydraulic lifting jack with foot pedal with oil being pumped by means of a piston into a plunger cylinder.

To lift the top plate, the foot pedal has to be depressed by approx. 40° several times. The pedal returns to its off-position by means of a return spring.

**1.10.4 Lowering**

To lower the top plate, the foot pedal has to be pressed upwards by approx. 10°. Thereby the oil returns due to the weight of the user's load from the plunger cylinder into the reservoir, the top plate lowers.

**1.11 Maintenance**

**1.11.1 Plan for maintenance**

Maintenance works	Interval	by...
Cleaning, visual check of the lifting module and inspection of the guide unit	daily	operator
Control of the fixing screws, retighten if required. Control of the guide unit	half-yearly checks	expert
Check smooth running with little load over the entire stroke range	yearly	expert
Check smooth running with load over the entire stroke range	yearly	expert
Check the check valve of the internal lifting jack with load	yearly	expert
Revision by the manufacturer (recommendation)	after 50,000 cycles (lifting and lowering)	ROEMHELD service staff
Repair	in case of damages	ROEMHELD service staff

**Note**

Pay attention to the qualification of the personnel.

**1.11.2 Cleaning**

**WARNING**

**Danger of injury due to a lifting or lowering movement!**

- Do not reach into the stroke area during the lifting or lowering movement.

The following cleaning works have to be effected daily at the mechanical components.

1. Clean with cleaning clothes or cleaning rags.
2. Slightly lubricate the metallic components (plates, guides, etc.).

**1.11.2.1 Daily checks**

**WARNING**

**Danger of injury due to a lifting or lowering movement!**

- Do not reach into the stroke area during the lifting or lowering movement.

- Visual check of the lifting module
- Check the guide unit for damages and possible running marks, repair if required.

### 1.11.2.2 Half-yearly checks

- Check all fixing screws of the lifting module, retighten if required.
- Check all cable fixings and fittings, retighten if required.
- Check the wear of the guide unit based on the guiding clearance. If the clearance exceeds 0.5 mm, the guiding elements have to be exchanged. (See chapter repair).

### 1.11.2.3 Yearly checks

To maintain the product in a safe condition and ready for operation, the function safety of the internal lifting jack has to be checked annually by an expert (see maintenance schedule).

### 1.11.3 Check smooth running of the product with little load over the entire stroke range

#### CAUTION

##### Function of the product!

If the product does not work perfectly, even if only partial stroke ranges are affected, the product must no longer be used.

- Observe the checking intervals.
- Press the foot pedal upwards until the top plate is completely lowered.
- Fix the test weight at the top plate (10% of the nominal load).
- Depress the foot pedal several times until the top plate is completely lifted.
- Press the foot pedal upwards until the top plate is completely lowered.

### 1.11.4 Check smooth running of the product with load over the entire stroke range

#### CAUTION

##### Function of the product!

If the product does not work perfectly, even if only partial stroke ranges are affected, the product must no longer be used.

- Observe the checking intervals.
- Press the foot pedal upwards until the top plate is completely lowered.
- Fix the test weight at the top plate (nominal load).
- Depress the foot pedal several times until the top plate is completely lifted.
- Press the foot pedal upwards until the top plate is completely lowered.

### 1.11.5 Check the check valve of the internal lifting jack with load

#### NOTE

##### Operating set

If the top plate of the product lowers independently, it may no longer be operated!

- Press the foot pedal upwards until the top plate is completely lowered.
- Fix the test weight at the top plate (nominal load).
- Depress the foot pedal several times until the top plate is completely lifted.
- Top plate may not lower independently

### 1.11.6 Repair

#### NOTE

##### Repair works

- Repair works, as e.g. the change of the interior lifting jack may only be effected by the ROEMHELD service technicians.

### 1.12 Trouble shooting

#### CAUTION

##### All work by service personnel only!

- All works only to be effected by ROEMHELD service staff.

Trouble	Cause	Remedy
Top plate does not lift or lower after the operation of the foot pedal	Internal lifting jack defect	Replace internal lifting jack
Top plate lowers without operation of the foot pedal	Internal lifting jack defect	Replace internal lifting jack

### 1.13 Technical characteristics

Max. lifting force	1000, 2000 N
Stroke	300, 400, 600, 800, 1000 mm
Function	Manual-hydraulic
Operation	Foot pedal
Lifting profile	Aluminium, colourless anodised
Top and bottom plate	Aluminium, black anodised

Type	Lifting force [N]	Pump strokes per 100 mm	Descent speed [mm/s]
8918-01-XX-H	1000	2.2	90
8918-02-XX-H	2000	3.5	60

Type	Stroke [mm]	Weight [kg]
8918-XX-30-H	300	15
8918-XX-40-H	400	20
8918-XX-60-H	600	25
8918-XX-80-H	800	30
8918-XX-100-H	1000	35

**Side loads**

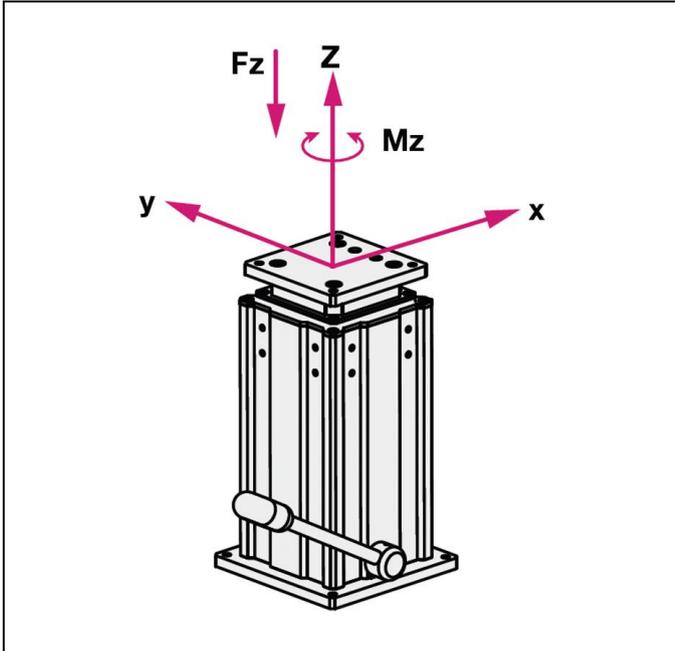


Figure 5: Side loads

Max. load torque $M_z$	300 Nm
Max. load torque $M_x$ or $M_y$	500 Nm

**Tightening torques**

The tightening torques for the fixing screws of the customer's connecting construction are to be taken from the VDI guideline 2230.

**Emissions**

The A valued continuous sound level is less than 70 dB(A) in operation.

**1.14 Accessory**

<b>Base plate for increased stability</b>	
Part-no.	6311-412
Data sheet	M 8.100
Further accessories	M 8.110, M 8.130, M 8.131

**1.15 Disposal**



**Hazardous to the environment**

Due to possible environmental pollution, the individual components must be disposed only by an authorised expert company.

The individual materials have to be disposed as per the existing regulations and directives as well as the environmental conditions.

Special attention has to be drawn to the disposal of components with residual portions of hydraulic fluids. The instructions for the disposal at the material safety data sheet have to be considered.

For the disposal of electrical and electronic components (e.g. stroke measuring systems, proximity switches, etc.) country-specific legal regulations and specifications have to be kept.

### 1.16 Declaration of conformity



#### Manufacturer

Römheld GmbH Friedrichshütte  
Römheldstraße 1-5  
35321 Laubach, Germany  
Tel.: +49 (0) 64 05 / 89-0  
Fax: +49 (0) 64 05 / 89-211  
E-mail: info@roemheld.de  
www.roemheld.com

#### Responsible person for the documentation:

Dipl.-Ing. (FH) Jürgen Niesner, Tel.: +49(0)6405 89-0.

This declaration of conformity applies to the following products:

Manual-hydraulic lifting modules of the data sheet M 4.202.

The following types or part numbers are concerned:

- 8918-01-30-H, -40-H, -60-H, -80-H, -100-H
- 8918-02-30-H, -40-H, -60-H, -80-H, -100-H

We hereby declare that the machine described in its design and construction as well as in the version we have placed on the market complies with the essential health and safety requirements according to the following EC directives.

The following additional EU directives were applied:

- **2006/42/EC**, Machinery directive [[www.eur-lex.europa.eu](http://www.eur-lex.europa.eu)]

The following harmonised standards have been applied:

**Product Safety Act - ProdSG**; [editor: Federal Ministry of Justice and Consumer Protection, Germany]

**DIN EN ISO 12100**, 2011-03, Safety of machinery; Basic concepts, General principles for design (replacement for part 1 and 2)

**EN 1494; 2008**, Mobile or movable jacks and associated lifting equipment

**DIN EN ISO 4413**, 2011-04, Hydraulic fluid power - General rules and safety requirements for systems and their components

The technical documents according to the specified guidelines were created for the products.

The manufacturer obligates to provide the special documentation of the products to national authorities on demand.

If the product is modified and not approved by us, this declaration will become invalid.

Laubach, 02.10.2023

i.V. 

Ralph Ludwig  
Head of Research and Development

**Römheld GmbH**  
**Friedrichshütte**

### 1.17 Declaration of conformity



#### Importer

Roemheld (UK) Limited  
28 Knowl Piece, Wilbury Way,  
SG4 0TY Hitchin

E-Mail: sales@roemheld.co.uk  
www.roemheld.co.uk

#### Authorised person to compile the technical documentation:

Darren Rowell, 28 Knowl Piece, Wilbury Way, SG4 0TY Hitchin.

This declaration of conformity applies to the following products:

Manual-hydraulic lifting modules of the data sheet M 4.202.

The following types or part numbers are concerned:

- 8918-01-30-H, -40-H, -60-H, -80-H, -100-H
- 8918-02-30-H, -40-H, -60-H, -80-H, -100-H

We hereby declare that the machine described in its design and construction as well as in the version we have placed on the market complies with the essential health and safety requirements according to the following UKCA directives.

The following additional UKCA directives were applied:

- **Directive 2008 No. 1597**, Health and Safety

The following harmonised standards have been applied:

**Product Safety Act - ProdSG**; [editor: Federal Ministry of Justice and Consumer Protection, Germany]

**DIN EN ISO 12100**, 2011-03, Safety of machinery; Basic concepts, General principles for design (replacement for part 1 and 2)

**EN 1494; 2008**, Mobile or movable jacks and associated lifting equipment

**DIN EN ISO 4413**, 2011-04, Hydraulic fluid power - General rules and safety requirements for systems and their components

The technical documents according to the specified guidelines were created for the products.  
The manufacturer obligates to provide the special documentation of the products to national authorities on demand.

If the product is modified and not approved by us, this declaration will become invalid.

SG4 0TY Hitchin, 02.10.2023

Darren Rowell  
Managing Director,

**Roemheld UK Ltd**

## 2 Electro-mechanical version



### Table of contents

2.1	Description of the product	10
2.2	Validity of the documentation	10
2.3	Target group of this document	10
2.4	Symbols and signal words	10
2.5	For your safety	11
2.6	Personal protective equipment	11
2.7	Safety devices	11
2.8	Application	12
2.9	Installation	12
2.10	Start up	13
2.11	Operation	13
2.12	Maintenance	14
2.13	Trouble shooting	15
2.14	Technical characteristics	15
2.15	Accessory	15
2.16	Disposal	16
2.17	Declaration of conformity	16
2.18	Declaration of conformity	17

### 2.1 Description of the product

The lifting motion is generated by an electric motor with a spindle lifting gear.

The electrically operated variant is particularly suitable for positioning and adjusting tasks of working tables as well as for material supply and transport.

It excels by a smooth running.

### Operation

Lifting and lowering is triggered by push-buttons with touch control contact. After release of the push-button, the motion will be immediately stopped.

### 2.2 Validity of the documentation

This document applies to the following products:

Electro-mechanical lifting modules of the data sheet M 4.202.

The following types or part numbers are concerned:

- 8918-01-30-E, -40-E, -60-E, -80-E, -100-E
- 8918-02-30-E, -40-E, -60-E, -80-E, -100-E

### 2.3 Target group of this document

- Experts for installation and maintenance with electro-mechanical know-how.

### Qualification of the personnel

**Expert knowledge** means that the personnel must

- be in the position to read and completely understand technical specifications such as circuit diagrams and product-specific drawing documents,
- have expert knowledge (electric, hydraulic, pneumatic knowledge, etc.) of function and design of the corresponding components.

An **expert** is somebody who has due to its professional education and experiences sufficient knowledge and is familiar with the relevant regulations so that he

- can judge the entrusted works,
- can recognize the possible dangers,
- can take the required measures to eliminate dangers,
- knows the acknowledged standards, rules and guidelines of the technology.
- has the required knowledge for repair and mounting.

### 2.4 Symbols and signal words

#### **DANGER**

##### **Danger of life / heavy health damages**

Stands for an imminent danger.

If it is not avoided, death or very severe injuries will result.

#### **WARNING**

##### **Person damage**

Stands for a possibly dangerous situation.

If it is not avoided, death or very severe injuries will result.

#### **CAUTION**

##### **Easy injuries / property damage**

Stands for a possibly dangerous situation.

If it is not avoided, minor injuries or material damages will result.

#### **Hazardous to the environment**



The symbol stands for important information for the proper handling with materials that are hazardous to the environment.

Ignoring these notes can lead to heavy damages to the environment.



#### **Mandatory sign!**

The symbol stands for important information, necessary protection equipment, etc.

#### **NOTE**

This symbol stands for tips for users or especially useful information. This is no signal word for a dangerous or harmful situation.

## 2.5 For your safety

### 2.5.1 Basic information

The operating instructions serve for information and avoidance of dangers when installing the products into the machine as well as information and references for transport, storage and maintenance.

Only in strict compliance with these operating instructions, accidents and property damages can be avoided as well as trouble-free operation of the products can be guaranteed.

Furthermore, the consideration of the operating instructions will:

- avoid injuries
- reduce down times and repair costs,
- increase the service life of the products.

### 2.5.2 Safety instructions

The product was manufactured in accordance with the generally accepted rules of the technology.

Observe the safety instructions and the operating instructions given in this manual, in order to avoid personal damage or material damage.

- Read these operating instructions thoroughly and completely, before you work with the product.
- Keep these operating instructions so that they are accessible to all users at any time.
- Pay attention to the current safety regulations, regulations for accident prevention and environmental protection of the country in which the product will be used.
- Use the ROEMHELD product only in perfect technical condition.
- Observe all notes on the product.
- Use only accessories and spare parts approved by the manufacturer in order to exclude danger to persons because of not suited spare parts.
- Respect the intended use.
- You only may start up the product, when it has been found that the incomplete machine or machine, in which the product shall be mounted, corresponds to the country-specific provisions, safety regulations and standards.
- Perform a risk analysis for the incomplete machine, or the machine.

Due to the interactions between the product and the machine/fixture or the environment, risks may arise that only can be determined and minimized by the user, e.g. :

- generated forces,
- generated movements,
- Influence of hydraulic and electrical control,
- etc.

### 2.5.3 Warning

#### **WARNING**

##### **Injuries due to misuse, incorrect operation or abuse!**

Injuries can occur if the product is not used within the intended use and the technical performance data.

- Before start up, read the operating instructions!

## 2.6 Personal protective equipment



**For works at and with the product, wear safety goggles!**



**For works at and with the product, wear protective gloves!**



**For works at and with the product, wear safety shoes!**

## 2.7 Safety devices

The below safety devices are for the safety of the operators. As a matter of principle no safety devices may be detached, put out of action or modified.

### Used safety devices



Figure 6: Positions of the safety devices

I	Name plate with details of max. load, etc. (position can vary)	O	Mandatory sign "Read and follow the operating instructions"
p	Protective frame		

### 2.7.1 Check the safety devices

#### **NOTE**

##### Use the regulations

- To check the safety device use the check lists "General examination" and / or "Functional testing". Eliminate immediately recognised defects at the safety devices.

##### Testing intervals

- at the beginning of every shift
- once a week in case of continuous shift
- after each maintenance or repair

##### Testing content

- Function
- State and position
- Safe fixing

## General examination

Covers	Number, available and undamaged
Screw plugs	Number, available and undamaged
Name plates with specifications	Number, available, readable and undamaged
Danger signs	Number, available and undamaged
Mandatory signs	Number, available and undamaged
Further safety devices available	available, undamaged and ready for operation
Testing date:	Tester (signature):

(Number see "Position of safety devices")

## 2.8 Application

### 2.8.1 Intended use

The products are used in industrial applications to occasionally carry out lifting and lowering movements with an electric motor.

Furthermore, the following are intended uses:

- Use within the capacity indicated in the technical data (pay particular attention to the admissible torque load).
- Use as per operating instructions.
- Compliance with service intervals.
- Qualified and trained personnel for the corresponding activities.
- Mounting of spare parts only with the same specifications as the original part.
- Max. push load only with the lifting force indicated below technical characteristics.
- Position of the load's gravity centre within the top plate.
- Use only within closed, low-dust rooms

### 2.8.2 Misapplication

#### **⚠ WARNING**

##### **Injuries, material damages or malfunctions!**

Modifications can lead to weakening of the components, reduction in strength or malfunctions.

- Do not modify the product!

The use of these products is not admitted:

- For domestic use.
- On pallets or machine tool tables in primary shaping and metal forming machine tools.
- In areas for which special guidelines apply, especially installations and machines:
  - For the use on fun fairs and in amusement parks.
  - In food processing or in areas with special hygiene regulations.
  - In mines.
  - In explosive and aggressive environments (e.g. ATEX).
- For other operating and environmental conditions.
- For applications other than vertical lifting of loads. Hanging operation (e. g. from the ceiling) is inadmissible.
- Not suitable for applications with strong impact loads or strong vibration.

**Special solutions are available on request!**

## 2.9 Installation

### 2.9.1 Design

#### **⚠ WARNING**

##### **Injury by dropping parts!**

Some products have a heavy weight and can cause injury when dropping.

- Transport products professionally.
- Wear personal protection equipment!

Weight specifications see chapter "Technical characteristics".

#### **⚠ CAUTION**

##### **Heavy weight may drop**

- Some product types have a considerable weight. These have to be secured against dropping during transport.
- Weight specifications see chapter "Technical characteristics".

##### **Transverse forces and forced conditions!**

Side loads and forced conditions on the product lead to the premature failure.

- Avoid forced conditions (overdetermination) of the product.
- Max. forces and torques see technical characteristics.

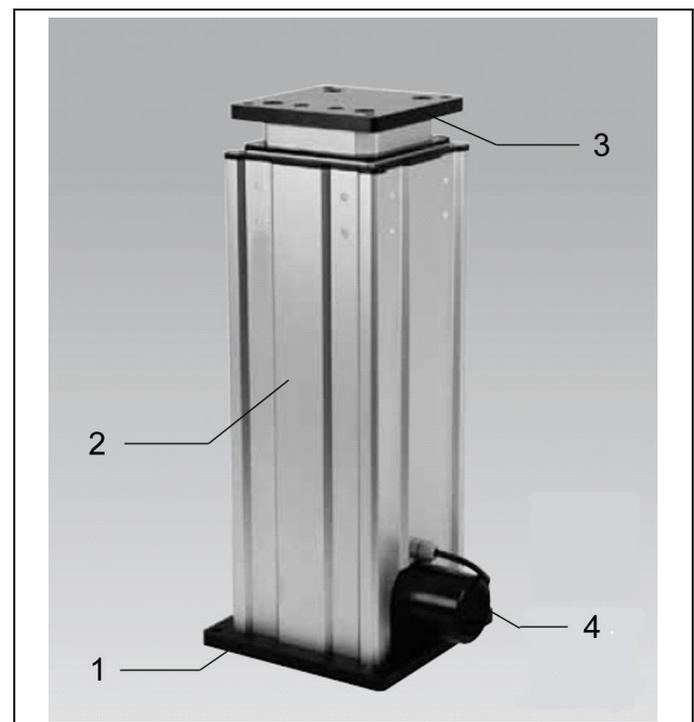


Figure 7: Components

1 Base plate	3 Top plate
2 Guide unit	4 Linear actuator with connecting cable

### 2.9.2 Fixing of the product

#### **⚠ WARNING**

##### **Injury due to overturning product!**

- Overturning product due to missing or incorrect fixing!
- Fasten bottom plate on the floor.
- When introducing torques within the load limit (see technical characteristics) we recommend to use an additional base plate (accessory) and to secure this plate correctly.

1. Install the product so that for the required cleaning and maintenance works there is all around a clearance zone of at least 700 mm.
2. The product has to be mounted horizontally on a plane and solid concrete floor (concrete strength grade B 25) or a rigid connecting construction of the customer (flatness 0.20 mm).
3. Fasten the bottom plate of the product with hexagon socket head cap screws ISO 4762 - M10 onto the concrete floor or the connecting construction of the customer.
4. For this purpose professionally insert into the concrete floor heavy-duty dowels (e.g. Fischer part-no.: SL M-10 N).

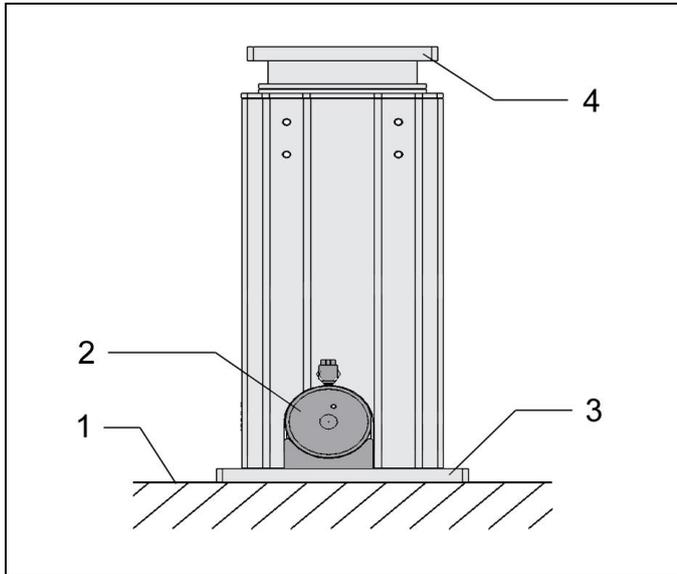


Figure 8: Principle of fixing

1 Concrete floor or connecting construction	3 Base plate
2 Linear unit	4 Top plate

### 2.9.3 Mounting of the customer's connecting construction

#### **⚠ WARNING**

##### **Injury due to overturning product!**

- Overturning product due to eccentric load provided by the user!
- The centre of gravity of the user's load must be within the 4 fixing screws of the bottom plate.
- When introducing torques within the load limit (see technical characteristics) we recommend to use an additional base plate (accessory) and to secure this plate correctly.

1. For fixing of the customer's connecting construction there are 4 bore holes (for M10 -  $\varnothing$  10.5 mm ) at the top plate. All provided bore holes have to be used!
2. Fasten the connecting construction at the top plate.

#### **NOTE**

##### **Dangers due to the connecting construction of the customer**

Dangers due to the connecting construction of the customer, as e.g. squeezing points have to be excluded by the customer's design.

### 2.10 Start up

#### **⚠ WARNING**

##### **Injury / burning due to contact with energized parts!**

- Before working on electric equipment, the energized parts must be de-energized and secured.
- Do not open protection covers at electric parts.
- All electrical works must only be realised by electricians.

Check tight seat (check seating torque of the fixing screws).

To operate the lifting modules one of the control modules listed in the following, a hand panel or foot switch and a mains cable is required.

#### **NOTE**

##### **Use only original components**

- The lifting modules must only be used in conjunction with the components which belong to the system. Components, which do not belong to the system or not permitted devices must under no circumstances be connected.

##### **components**

- control module
- Hand panel
- Foot switch
- Mains cables

No. of component see catalog sheet

#### **NOTE**

##### **Connection of operating elements**

- For the connection of the operating elements and the mains cable as well as the pin assignment see operating instructions BA M8200.

- 1 Connection of the lifting module to the supply unit. The cable bushing of the lifting module must be put into the provided plug connector in the housing of the control modul. Then the screw of the cable bushing has to be tightened with a torque of 0.4 Nm.
- 2 Correct fixing of the control modul near the lifting module.

### 2.11 Operation

#### **⚠ WARNING**

##### **Injuries due to non-compliance of the operating instructions!**

- The product may only be operated, if the operating instructions - especially the chapter "Safety instructions" have been read and understood.

##### **Injury by crushing!**

Components of the product make a movement while they are in operation, this can cause injuries.

- Keep parts of the body and items out of the working area!

##### **Injuries due to misuse, incorrect operation or abuse!**

Injuries can occur if the product is not used within the intended use and the technical performance data.

- Before start up, read the operating instructions!

##### **Risk of injury due to squeezing points in the connecting construction**

The connecting construction has to be designed so that there are no squeezing points. The movement of the lifting modules can cause risks for the user in connection with squeezing points.

The operator is obliged to report immediately any changes at the product that may affect the safety to the safety expert or to the person who is responsible for safety and to stop operating the product.

### 2.11.1 Working place

The working place is destined in front of the lifting module.

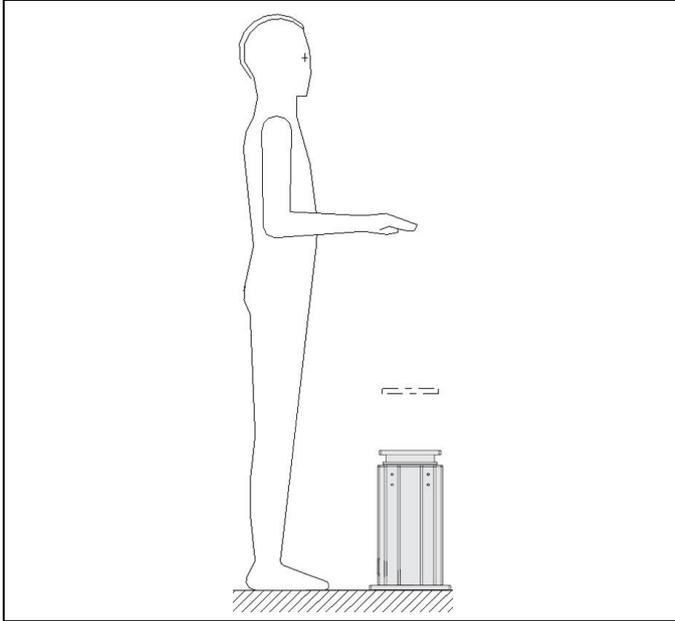


Figure 9: Working place

### 2.11.2 Behaviour in an emergency

In emergencies the product may not be operated.

### 2.11.3 Lifting and lowering

It is operated in conjunction with a control module and operating elements. Further possibilities of operation and control can be found in the corresponding operating instructions.

By operating the direction key lifting (↑) or lowering (↓) at the hand panel or foot switch the lifting module will be extended or retracted. Due to the touch control, the respective direction key must remain actuated during the lifting or lowering.

An electronic current limitation in the supply unit protects the lifting module against overload. If for example in case of overload the lifting module is working longer than 1 second in the range of the current limitation, the lifting module will be switched off. The function is restored after release of the push-button operation.

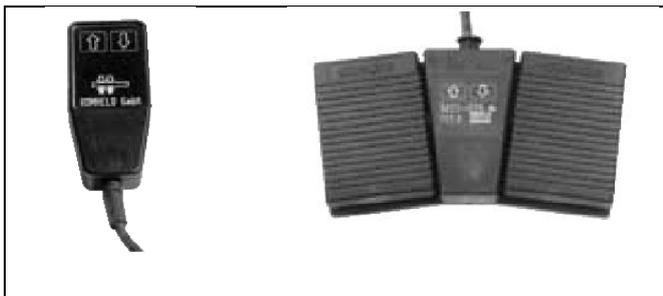


Figure 10: hand panel and foot switch

## 2.12 Maintenance

### 2.12.1 Service life

The service life is:

250 operating hours (only time required for stroke) for the units 2 kN and 4 kN with duty cycle 15%, 1.5 min ON

60 operating hours (only time required for stroke) for the units 6 kN with duty cycle 15%, 1.5 min ON

### 2.12.2 Plan for maintenance

Maintenance works	Interval	by...
Cleaning, visual check of the lifting module and inspection of the guide unit	daily	operator
Check all fixing screws and cable fixings and fittings, retighten if required. control of the guide unit	half-yearly checks	expert
The electrical components of the lifting module are to be checked by an expert at regular intervals, but at least once a year.	yearly checks	expert
Repair	in case of damages	ROEMHELD service staff

### NOTE

Pay attention to the qualification of the personnel.

### 2.12.3 Cleaning

#### WARNING

**Danger of injury due to a lifting or lowering movement!**

- Do not reach into the stroke area during the lifting or lowering movement.

The following cleaning works have to be effected daily at the mechanical components.

- Clean with cleaning clothes or cleaning rags.
- Slightly lubricate the metallic components (plates, guides, etc.).

#### 2.12.3.1 Daily checks

#### WARNING

**Danger of injury due to a lifting or lowering movement!**

- Switch off the mains before cleaning and maintenance works.

- Visual check of the lifting module
- Check the guide unit for damages and possible running marks, repair if required.

#### 2.12.3.2 Half-yearly checks

#### WARNING

**Danger of injury due to a lifting or lowering movement!**

- Switch off the mains before cleaning and maintenance works.

- Check all fixing screws of the lifting module, retighten if required.

- Check the wear of the guide unit based on the guiding clearance. If the clearance exceeds 0.5 mm, the guiding elements have to be exchanged. (See chapter Repair).

### 2.12.3.3 Yearly checks

#### **⚠ WARNING**

##### **Danger of injury due to a lifting or lowering movement!**

- Switch off the mains before cleaning and maintenance works.

The electrical components of the lifting module are to be checked by an expert at regular intervals, but at least once a year. The check includes:

- The perfect functioning
- The state of the component
- Check the Occupational Health and Safety Regulations of the trade associations (German DGUV Vorschrift 3)

### 2.12.4 Repair

Repair works, as e.g. the change of internal linear actuator may only be effected by the service technicians of the company Röhmed.

### 2.13 Trouble shooting

#### **⚠ CAUTION**

##### **All work by service personnel only!**

- All works only to be effected by ROEMHELD service staff.

Trouble	Cause	Remedy
Top plate does not lift or lower after the operation of the push-button	Interior linear actuator defect	Linear actuator to be replaced by ROEMHELD service personnel
Top plate lowers without operation of the push-button	Interior linear actuator defect	Linear actuator to be replaced by ROEMHELD service personnel

### 2.14 Technical characteristics

Max. lifting force	1000, 2000 N
Stroke	300, 400, 600, 800, 1000 mm
Function	Electro-mechanical
Duty cycle	15% 1.5 min. ON
Code class	IP 54
Control voltage	24VDC
Protection class	II
Operation	Hand panel or foot pedal
Lifting profile	Aluminium, colourless anodised
Top and bottom plate	aluminium, black anodised

Type	Lifting force [N]	v <sub>H</sub> [mm/s]	I [A]
8918-01-XX-E	1000	34 ... 30	6.5
8918-02-XX-E	2000	18 ... 14	7.0

Type	Stroke [mm]	Weight [kg]
8918-XX-20-E	300	15
8918-XX-30-E	400	20

8918-XX-40-E	600	25
8918-XX-50-E	800	30
8918-XX-60-E	1000	35

### Side loads

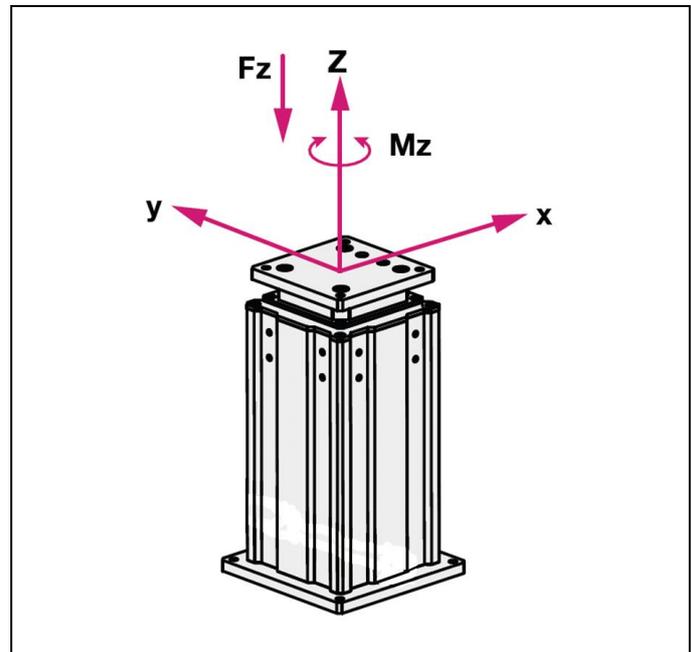


Figure 11: Side loads

Max. load torque M <sub>z</sub>	300 Nm
Max. load torque M <sub>x</sub> or M <sub>y</sub>	500 Nm

### Tightening torques

The tightening torques for the fixing screws of the customer's connecting construction are to be taken from the VDI guideline 2230.

### Emissions

The A valued continuous sound level is less than 70 dB(A) in operation.

### Circuit diagrams:

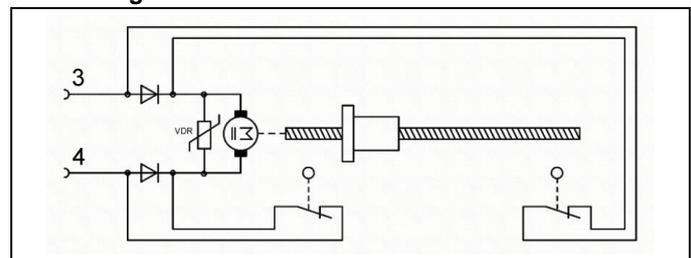


Figure 12: Lifting module standard (8918-0X-X0-E)

3 brown + (extend) - (retract)	4 blue - (extend) + (retract)
--------------------------------------	-------------------------------------

### 2.15 Accessory

<b>Base plate for increased stability, data sheet M 8.100</b>	
Part-no.	6311-412

<b>Electrical accessories, data sheet M 8.200</b>	
Foot switch	3823-038
Hand panel	3823-025

Supply unit for 1 lifting module	3821-246
Mains cable smooth	3823-040
Further accessory	M 8.110, M 8.130, M 8.131

## 2.16 Disposal



### **Hazardous to the environment**

Due to possible environmental pollution, the individual components must be disposed only by an authorised expert company.

The individual materials have to be disposed as per the existing regulations and directives as well as the environmental conditions.

For the disposal of electrical and electronic components (e.g. stroke measuring systems, proximity switches, etc.) country-specific legal regulations and specifications have to be kept.

## 2.17 Declaration of conformity



### Manufacturer

Römheld GmbH Friedrichshütte  
Römheldstraße 1-5  
35321 Laubach, Germany  
Tel.: +49 (0) 64 05 / 89-0  
Fax: +49 (0) 64 05 / 89-211  
E-mail: info@roemheld.de  
www.roemheld.com

### Responsible person for the documentation:

Dipl.-Ing. (FH) Jürgen Niesner, Tel.: +49(0)6405 89-0.

This declaration of conformity applies to the following products:

Electro-mechanical lifting modules of the data sheet M 4.202.

The following types or part numbers are concerned:

- 8918-01-30-E, -40-E, -60-E, -80-E, -100-E
- 8918-02-30-E, -40-E, -60-E, -80-E, -100-E

We hereby declare that the machine described in its design and construction as well as in the version we have placed on the market complies with the essential health and safety requirements according to the following EC directives.

The following additional EU directives were applied:

- **2006/42/EC**, Machinery directive [[www.eur-lex.europa.eu](http://www.eur-lex.europa.eu)]

The following harmonised standards have been applied:

**Product Safety Act - ProdSG**; [editor: Federal Ministry of Justice and Consumer Protection, Germany]

**DIN EN ISO 12100**, 2011-03, Safety of machinery; Basic concepts, General principles for design (replacement for part 1 and 2)

**DIN EN 60204-1**; 2007-06, Safety of machinery - Electrical equipment of machines, Part 1: General requirements

**DIN EN 61000-6-2**; 2005, Electromagnetic compatibility, immunity for industrial environments

**DIN EN 61000-6-4**; 2007, Electromagnetic compatibility, generic standards - emission standard for industrial environments

The technical documents according to the specified guidelines were created for the products.

The manufacturer obligates to provide the special documentation of the products to national authorities on demand.

If the product is modified and not approved by us, this declaration will become invalid.

Laubach, 02.10.2023

i.V. 

Ralph Ludwig  
Head of Research and Development

**Römheld GmbH**  
**Friedrichshütte**

## 2.18 Declaration of conformity



### Importer

Roemheld (UK) Limited  
28 Knowl Piece, Wilbury Way,  
SG4 0TY Hitchin

E-Mail: sales@roemheld.co.uk  
www.roemheld.co.uk

### Authorised person to compile the technical documentation:

Darren Rowell, 28 Knowl Piece, Wilbury Way, SG4 0TY Hitchin.

This declaration of conformity applies to the following products:

Electro-mechanical lifting modules of the data sheet M 4.202.

The following types or part numbers are concerned:

- 8918-01-30-E, -40-E, -60-E, -80-E, -100-E
- 8918-02-30-E, -40-E, -60-E, -80-E, -100-E

We hereby declare that the machine described in its design and construction as well as in the version we have placed on the market complies with the essential health and safety requirements according to the following UKCA directives.

The following additional UKCA directives were applied:

- **Directive 2008 No. 1597**, Health and Safety

The following harmonised standards have been applied:

**Product Safety Act - ProdSG**; [editor: Federal Ministry of Justice and Consumer Protection, Germany]

**DIN EN ISO 12100**, 2011-03, Safety of machinery; Basic concepts, General principles for design (replacement for part 1 and 2)

**DIN EN 60204-1**; 2007-06, Safety of machinery - Electrical equipment of machines, Part 1: General requirements

**DIN EN 61000-6-2**; 2005, Electromagnetic compatibility, immunity for industrial environments

**DIN EN 61000-6-4**; 2007, Electromagnetic compatibility, generic standards - emission standard for industrial environments

The technical documents according to the specified guidelines were created for the products.  
The manufacturer obligates to provide the special documentation of the products to national authorities on demand.

If the product is modified and not approved by us, this declaration will become invalid.

SG4 0TY Hitchin, 02.10.2023

Darren Rowell  
Managing Director,

**Roemheld UK Ltd**