



Rotating Module DMHe 140 - electrically operated

max. load 4,000 N, max. torque 140 Nm



Principal use

- Assembly work on workpieces up to 400 kg
- For turning and tilting components
- Inspection and adjustment work
- Hydraulic motors
- Hydraulic axes
- Gear assembly

Description

The DMHe 140 rotary module is an electrically driven rotation axis for handling and positioning workpieces.

At the push of a button, the electric motor drives a worm gear.

The drive is self-locking, so it reliably holds any intermediate position reliably without the need for an additional brake.

Application

The rotating module is an electro-mechanical unit without a safety device.

It is therefore advisable that the design and use of the module ensures edges are not crushed.

Ideally, the operating element should be arranged so that the operator is not in the immediate vicinity of the rotating parts during rotation.

The axis is filled with oil/grease. A minimal amount of lubricant leakage can therefore not be ruled out, and use in an environment where there is food or in a clean room is therefore not intended.

As the gearbox is self-locking, it also prevents eccentric loads from reversing. From this point of view, the electric rotating module is always a safe and ergonomic alternative to rotation axes with a latching function.

Advantages

- High static power reserves
- Stable bearing
- Simple installation and operation
- Infinite rotation
- Self-retaining
- Ready-to-connect subassembly (ready-to-operate)

Variants

Rotating module DMHe 140

Part no.: 650 8140 E

Hand panel operating element
supply voltage 230 V AC

Versions on request

- Foot switch operating element
supply voltage 230 V AC
- Hand panel operating element
battery supply voltage 24 V DC
- Foot switch operating element
battery supply voltage 24 V DC

Delivery

Rotating module DMHe 140 consists primarily of four components:

1. Rotation axis with motor and gear box
2. Control box
3. Hand panel
4. Mains cable

The components are ready to use and mounted as one subassembly. They are to be attached to suitable connecting constructions.


moduhub rotating module electrically operated

- horizontal

DMHe 140

Part no. 6508 140E

Max. load: 4000 N



Technical data

| | |
|----------------------|-----------------------|
| Angle of rotation: | 360° |
| Max. torque: | 140 Nm |
| Max. holding torque: | 1,000 Nm |
| Max. bending moment: | 1,200 Nm |
| Rotation: | any |
| Index: | no indexing positions |

Operation modes

- Foot switch
- Hand panel



Can be combined with the modules

Lifting modules

- Shop Floor Telescope
as per data sheet M 4.202
- Range
as per data sheet M 4.203
- Shop-Floor
as per data sheet M 4.301
- Strong
as per data sheet M 4.401
- Solid
as per data sheet M 4.402

moduhub interfaces

- Flange plate: 140 x 140 – M10
- Body: 140 x 140 – M10
200 x 200 – M10

Technical Data / Dimensions

Technical data

| | |
|-----------------------|--|
| Driven torque | 140 Nm |
| Holding torque | 1000 Nm |
| Bending moment | 1200 Nm |
| Rotation speed | approx. 3 rpm |
| Rotation angle | Infinite without stopping points self-locking in any position |
| Max. workpiece weight | 400 kg |
| Operating voltage | 24 V DC |
| Supply voltage | 230 V AC |
| Current consumption | < 10 A at 24 VDC |
| Part no. | 6508 140 E |

Installation / mounting

The lower, square flange plate of the rotating module fits on all *moduhub* lifting modules and can be easily installed and fixed there or, for example, on a workbench.

Attachments should be arranged in such a way that collisions cannot occur and edges cannot be crushed when turning.

Bottom housing interface

Flange plate *moduhub* 140 × 140 and 200 × 200

Rotating plate interface





moduhub 140 × 140

Operation

The rotating module is switched with push-buttons in touch control mode.


A hand panel is included in the scope of delivery. Foot switches are available as an option.

Dimensions

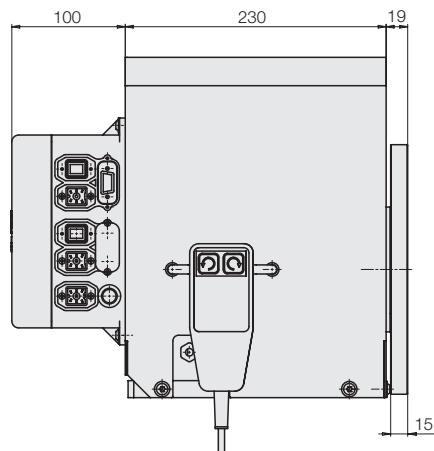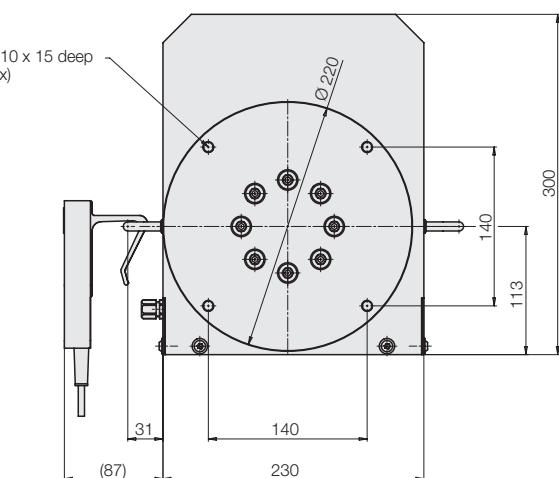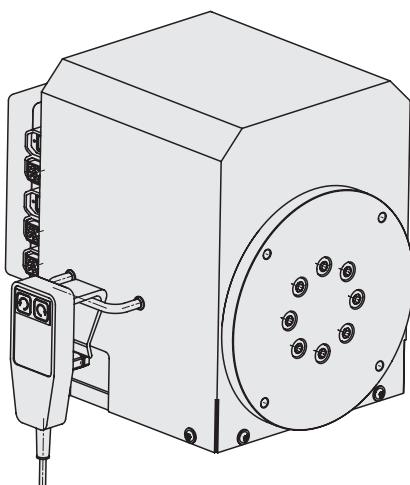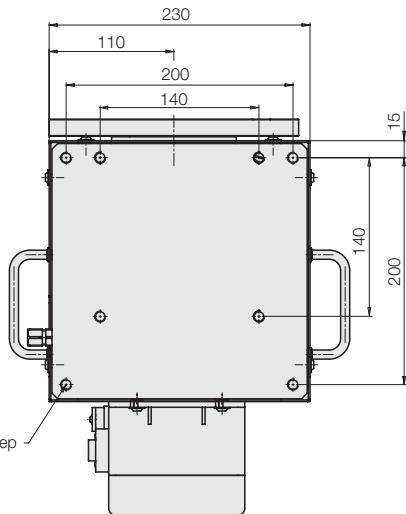


Application examples • Configuration options

Rotating module attached to the assembly fixture *moduLift* as per data sheet M 9.103

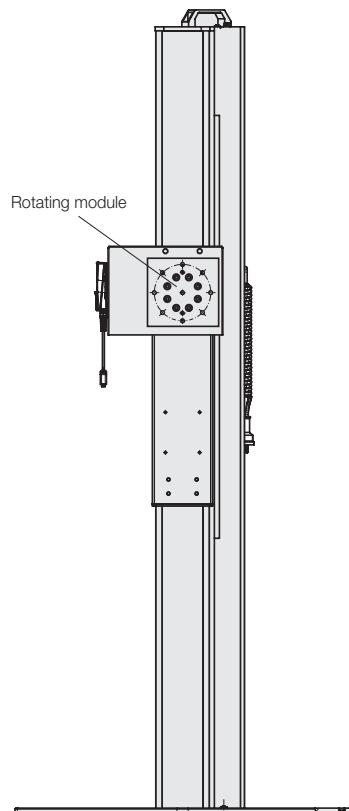

Rotating module mounted on lifting module with cart module (available on request)

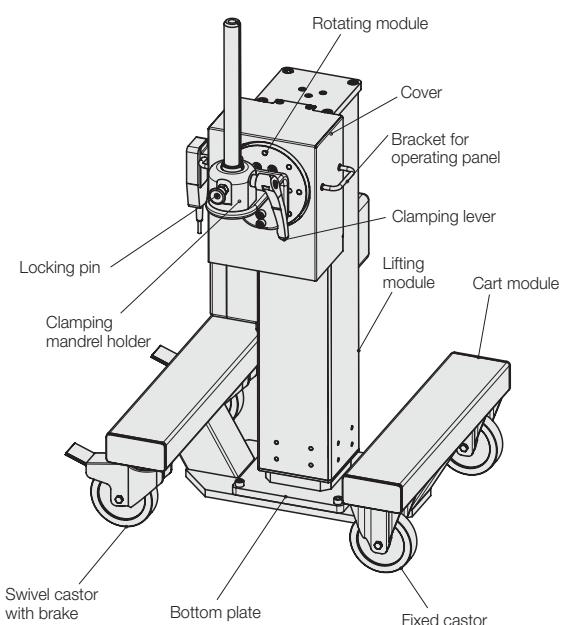

Rotating module mounted on lifting module Shop-Floor (available on request)

